




POINTER

Pointer Scissor lift 3 tons low profile movable



Pointer Scissor lift 3 tons low profile movable

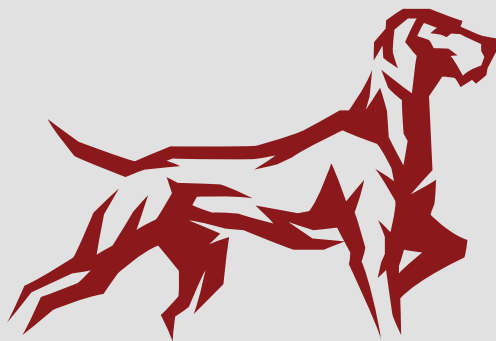

Features:

1. Minimum height is only 105mm, suitable for on ground installation.
 2. Main platform length is 1420mm, can be extended to 2000mm.
 3. Imported hydraulic seals, the whole system is reliable, scissor arms with International Standard solid steel Q345, very stable.
 4. Maximum height is 1000mm. Frame height adaptor is optional, satisfy different customer's requirement.
 5. Movable designed especially suitable for tire fast service and vehicle quick repair foot protection design and 24V voltage control, provide comprehensive protection
- The overall design is very suitable for replacing tires and oil change.

Lifting capacity	Lifting height	System pressure	Motor power	Voltage	N.W	MIN. Height	Platform Length
3.0T 6600LB	1000mm 39inch	25Mpa	2.2KW	380V	0.7T 1543LB	105mm 8inch	1420-2000mm 56-79inch

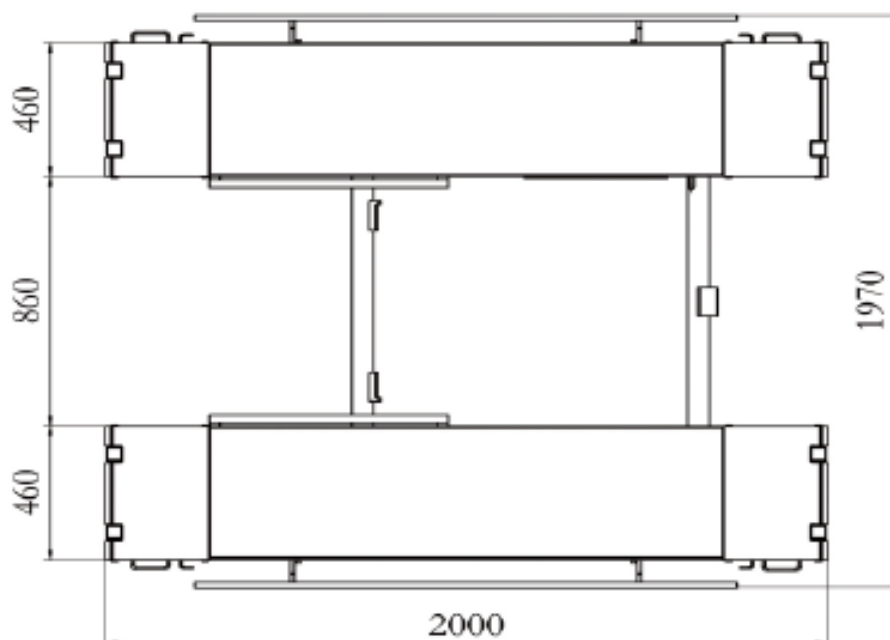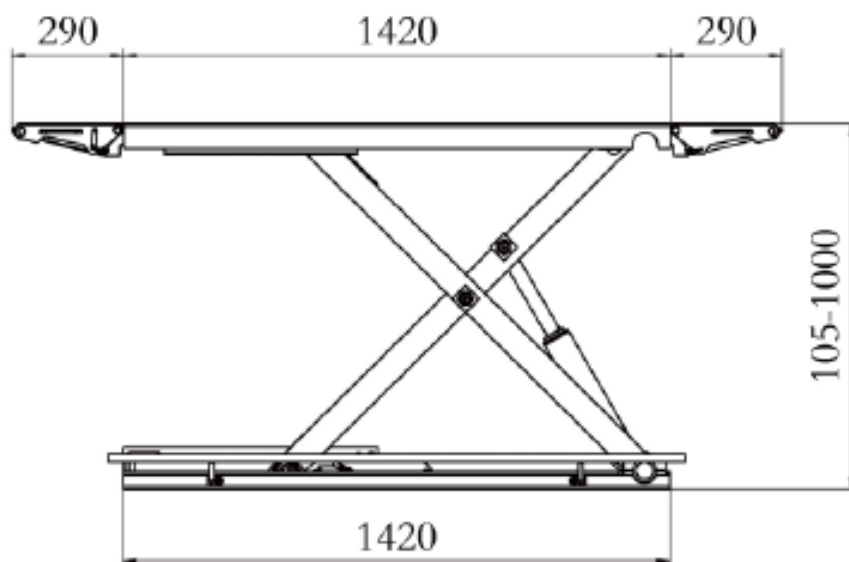

POINTER

www.pointer-il.co.il