




POINTER



Pointer scissor lift 3.5 tons

Pointer scissor lift 3.5 tons

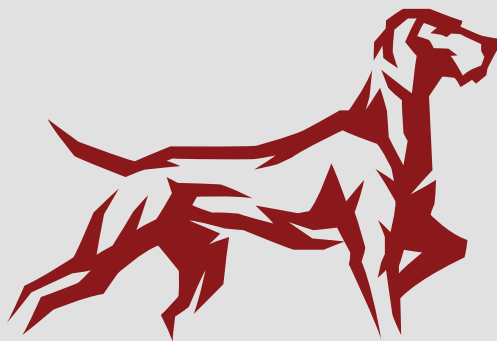

Features:

1. Equipped with easy leveling design, bring you a simple and fast leveling adjustment. Much lower failure rate than before; These two oil circuit systems are hydraulic locked by each other, which is safe and secure.
2. Minimum height is only 110mm, suitable for on ground installation. Main platform length is 1470mm, can be extended to 2042mm.
3. Scissor arms with International Standard solid steel Q345.
4. Dual-circuit design, more stable and secure.
5. Maximum height is 1900mm, height adaptor optional, satisfy different customer requirement.
6. Control system use PCB and Siemens electrical parts, stable performance. Ideal choice for quick tire replacement and simple service.

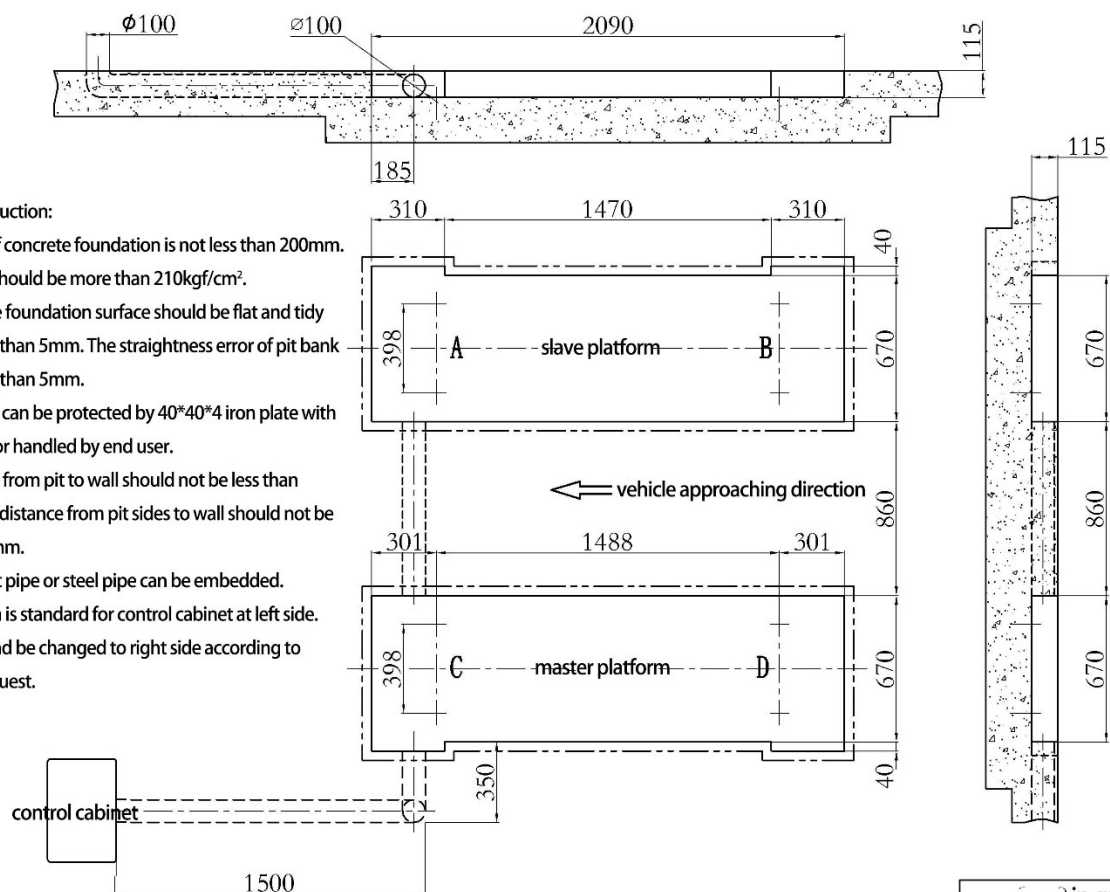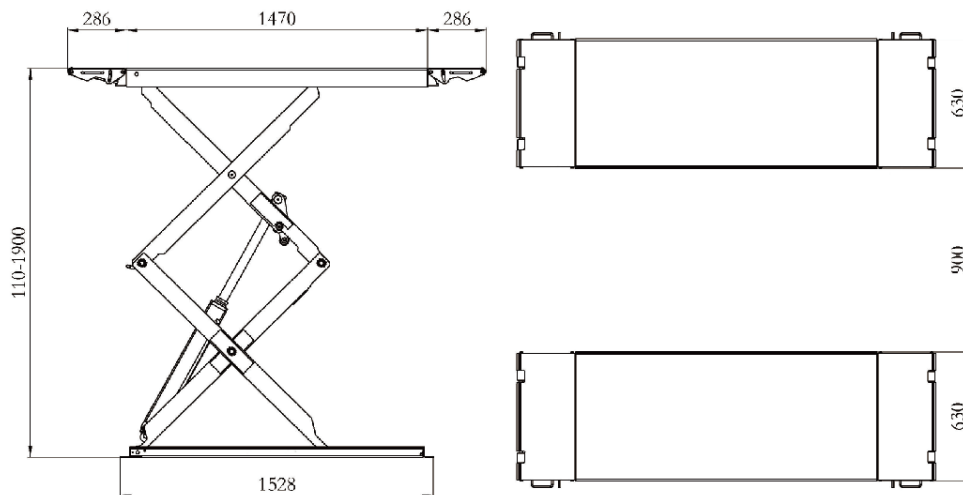

Technical Instruction:

- 1.The depth of concrete foundation is not less than 200mm. The strength should be more than 210kgf/cm².
- 2.The concrete foundation surface should be flat and tidy with error less than 5mm. The straightness error of pit bank should be less than 5mm.
- 3.The pit edge can be protected by 40*40*4 iron plate with welded hook or handled by end user.
- 4.The distance from pit to wall should not be less than 2200mm. The distance from pit sides to wall should not be less than 750mm.
- 5.Ø100 plastic pipe or steel pipe can be embedded.
- 6.This diagram is standard for control cabinet at left side. The cabinet can be changed to right side according to customers request.

in ground
installation diagram



POINTER

www.pointer-il.co.il