




POINTER

Pointer scissor lift 5.5 ton lifting table

Pointer scissor lift 5.5 ton lifting table

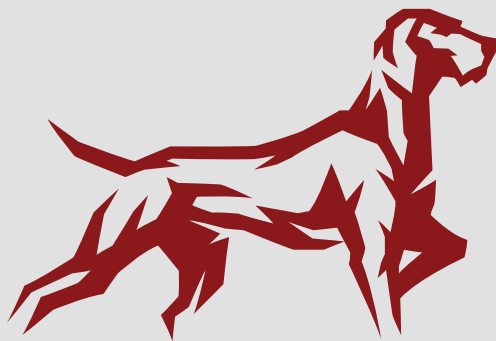


Features:

1. Minimum height is only 305mm, suitable for on ground surface installation.
2. Max height of the main platform is 2160mm, sub-platform can be extended, suitable for more longer vehicles.
3. Standard configuration equipped with Chassis LED lights, Photocell leveling security sensor. Such strong configuration can make lifting operation more safe.
4. Punching design ramp, slip-resistant performance is much better.
5. Imported hydraulic seals, the whole system is reliable.
6. With 6 synchronous cylinders design, high accurate synchronization, easy operation for platforms leveling adjustment.
7. Control system with PCB and Siemens electrical parts, stable performance.
8. Optional: Pneumatic control slip plate.

The overall design is very suitable for vehicle wheel alignment, ROC and body inspection, maintenance services.

Lifting Capacity	5.5 T (12125LB)
Lifting Height	420/2160mm (16/80inch)
System Pressure	25Mpa
Air Pressure	0.5-0.8Mpa
Motor Power	3KW
Voltage	380/220V
N.W	3.6T (8000LB)
MIN.Height	305mm (12inch)
Platform Length	5300mm (209inch)

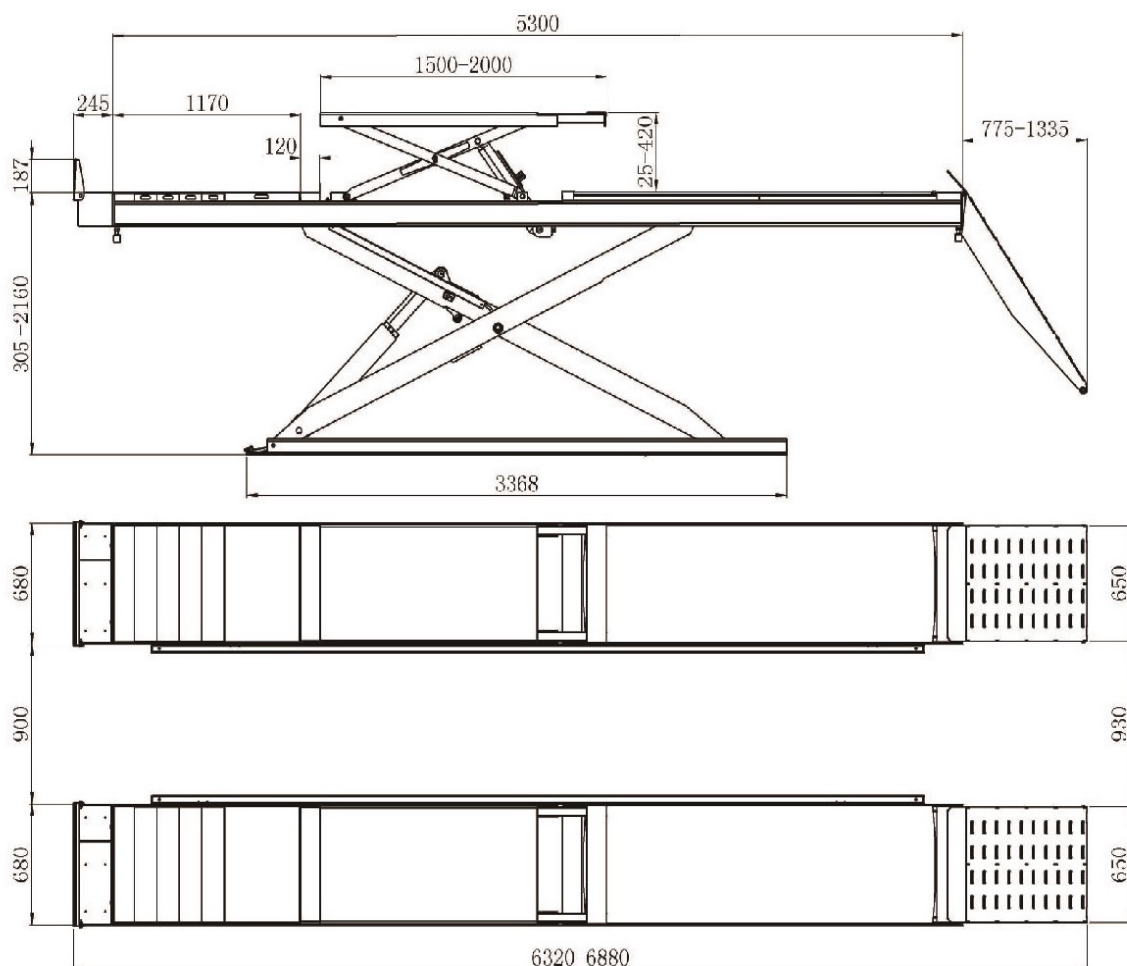

OVERALL DIMENSION



POINTER

www.pointer-il.co.il